

IsoTemp Solution on Mercedes-Benz Metris



Fully Integrated & Climate Controlled Cargo Isolation System



Customizable with up to 3 separate temperature controlled environments from -5°F to 60°F

Ideal for applications including:

- Food Delivery
- Biomedical Transport
- Catering

*ATP & HACCP Certified



STANDARD EQUIPMENT

- Modular, insulated fiberglass panels
- Non-slip floor
- Fully insulated doors
- Floor drain
- Interior lighting (LED ceiling light)

PRODUCT FEATURES

- Modular kit assembly for high volume upfits
- Best-in-class thermal insulation
- Fiberglass panels are leak-free and easy to clean

SPECIFICATIONS

| Wheelwell Width | lnner Length | lnner Width | Inner Height | Cargo Area Volume | Insulation Weight | |
|--------------------|-----------------|----------------|-----------------|----------------------|----------------------|--|
| 48.42" | 92" | 58.26" | 44.68" / 47.63" | 131 cubic ft. | 441 lbs. | |

CLIMATE CONTROL SYSTEM

- Industry standard cooling units available from multiple manufacturers



IsoTemp Solution on Mercedes-Benz Metris

OPTIONS



- **Raised Platform**
- Additional door seal for isolated cargo area (standard)



Stainless steel doorstep protection



- Clear PVC strip curtains Available for side or rear doors _



Aluminum fold-down shelves



IsoTemp Solution on Mercedes-Benz Metris

Thermo King Reefer Application

| | | | | Thermo King Direct Drive Application | | | |
|---------------|-----------|-----------|--------------------------|--------------------------------------|--------------------------|--------------|----------------|
| | | | 10 Door Openings Per Day | | 30 Door Openings Per Day | | |
| Van Make | Van Model | Wheelbase | Roof Height | Fresh (35° F) | Frozen (–4º F) | Fresh (35°F) | Frozen (–4°F) |
| Mercedes-Benz | Metris | 126 in. | Standard | B100 | Not Compatible | B100 | Not Compatible |

*Outside temperature up to 104°F. Check with your sales representative for outside temperatures over 104°F.


**Standard units have suffix "10." The "10" series does not offer power standby.

***Shore power units are represented with suffix "20." The "20" series is offered with 115/1/60 Hz, 220/1/60 Hz or 230/3/60 Hz power standby options.

Zanotti Reefer Application

| Reeler Application | | | | | 30 Door Openings Per Day | | |
|--------------------|---------------|-----------|-----------|-------------|--------------------------|----------------|--|
| | Van Make | Van Model | Wheelbase | Roof Height | Fresh (35°F) | Frozen (–4º F) | |
| | Mercedes-Benz | Metris | 126 in. | Standard | Z120 | Z120X | |

*Outside temperature up to 104°F. Check with your sales representative for outside temperatures over 104°F. **All units represented in this matrix include standby option.

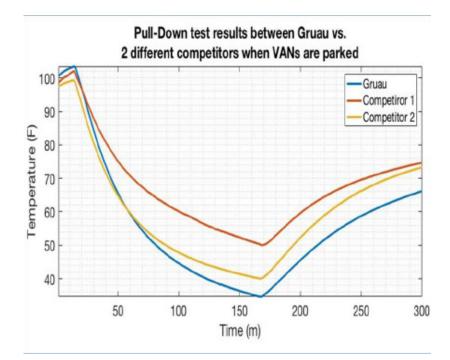

- Gruau with TKV200, 61.8% less powerful than the TK320 of competitors

- Gruau operated on idle offering less than 60% of TK200 capacity while the others operated on stand by


- Gruau started with 107F and cooled to 34.6 F in 2h 37m (157 minutes)

Competitor #1 & #2 never reached
35°F fresh despite a more powerfull
V320 unit.



About Gruau

Gruau is a French, 5th generation family-owned company that has been in business for over 126 years, specializing in the conversions of light commercial vehicles. With over 1,600 employees and 50,000 conversions per year for customers and OEMs around the world, Gruau is Europe's leading body builder. Its 18 commercial and industrial facilities offer unique design, commercial and industrial capacity.

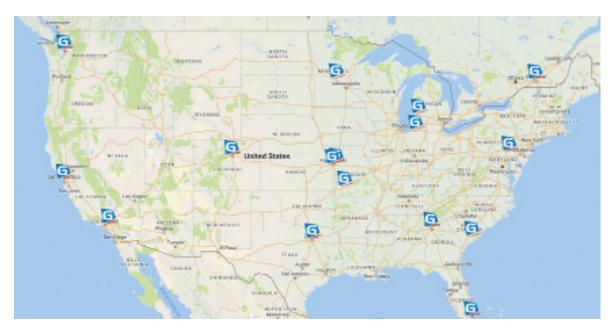

Gruau is expanding its network with long term quality partners that have been trained both technically and commercially.

Please contact us for more information

Michel MENIL - CEO

🔀 michel.menil@gruau.com

\$ 312-952-2458

Lis CASTOLDI - Sales & Marketing Development

🔀 lis.castoldi@gruau.com

S 312-320-6040