

KNAPHEIDE
SINCE 1848

// GM

STEEL GOOSENECK BODIES



KNAPHEIDE GOOSENECK BODIES

Versatility with storage solutions to meet every need, Knapheide Gooseneck Bodies are an easy choice. Rugged construction, enhanced styling and secure storage give you a body that can haul it all.

Reliable offerings range from the economical PGNA, mid-level PGNB, skirted PGNC and the deluxe PGND.

// **PGND**
GOOSENECK BODIES



// **PGNC**
GOOSENECK BODIES



// **PGNB**
GOOSENECK BODIES



// **PGNA**
GOOSENECK BODIES







PGND-116
**Body may be shown
with optional features*

// PGND GOOSENECK BODIES

STANDARD FEATURES

- Rugged 14-gauge two-sided A-40 galvanized steel body shell
- 250-lb. capacity shelves made of spangled steel (2 in each front vertical compartment, 1 in each rear compartment)
- Three-quarter length flip top compartments employ nitrogen gas struts for smooth opening and closing
- Bulkhead and rear skirt include integrated oval B/U and S/T/T LED lights
- Rugged 1/8" thick tread plate floor with 5" structural channel long sills
- 3" formed 12-gauge cross sills
- Under-the-floor gooseneck hitch system with 2-5/16" ball installed (hitch is rated at 30,000 lb. gross trailer weight with 5,000 lb. tongue weight)
- Hinged access door to cover gooseneck hitch when not in use
- Integrated Class V receiver hitch rated at 18,000 lb. (optional on 8' bodies as most 56" CA chassis include a factory hitch)
- Formed, integrated bulkhead with stylized screened window and tapered design for improved visibility
- 8" tall slam tailgate with center-mounted release handle
- Safety chain attachment points and 7-way trailer plug included in gooseneck box and at receiver hitch
- Durable oven-cured coat, finish painted black
- Aluminum tread plate trim piece on rear hitch plate provides a "no worry" step location
- 36" high front compartments
- Continuous stainless steel hinges are pry-proof and corrosion-resistant
- Features double-shell, 20-gauge, two-sided A-40 galvanized steel compartment doors
- Automotive quality, rotary-style latches make opening and closing easy
- Interior cover protects internal latch from damage
- Adjustable security ring strikers provide a weather-tight seal
- Neoprene door seals protect compartments from the weather
- Double-spring over-center door retainer eliminates involuntary door swing
- All marker, clearance and I.D. lights are LED
- Integrated driver side fuel fill cup
- Electrodeposition prime-paint system provides superior corrosion resistance

// PGNC GOOSENECK BODIES



PGNC-116
**Body may be shown
with optional features*

STANDARD FEATURES

- Skirted gooseneck styling with integrated front and rear toolboxes
- Rub rails installed on both sides of DRW bodies for strap, side and stake pocket protection. Underbody tie down rails are not available on PGNC SRW models.
- Rugged 1/8" thick tread plate floor with 6" structural channel long sills (4" on 8' models)
- 12-gauge formed cross sills, spaced on 16" centers
- Bulkhead and rear skirt include integrated oval LED B/U and S/T/T lights
- Under-the-floor gooseneck hitch system with 2-5/16" ball installed (hitch is rated at 30,000 lb. gross trailer weight with 5,000 lb. tongue weight)
- Hinged access door to cover gooseneck hitch when not in use
- Integrated Class V receiver hitch rated at 18,000 lb. (optional on 8' bodies as most 56" CA chassis include a factory hitch)
- Formed, integrated bulkhead with stylized screened window and tapered design for improved visibility
- Aluminum tread plate trim piece on rear hitch plate provides a "no worry" step location
- Safety chain attachment points and 7-way trailer plug included in gooseneck box and at receiver hitch
- Durable oven-cured coat, finish painted black
- Continuous stainless steel hinges are pry-proof and corrosion-resistant
- Features double-shell, 20-gauge, two-sided A-40 galvanized steel compartment doors
- Automotive quality, rotary-style latches make opening and closing easy
- Interior cover protects internal latch from damage
- Adjustable security ring strikers provide a weather-tight seal
- Neoprene door seals protect compartments from the weather
- Double-spring over-center door retainer eliminates involuntary door swing
- All marker, clearance and I.D. lights are LED
- Integrated driver side fuel fill cup
- Electrodeposition prime-paint system provides superior corrosion resistance



PGNB-116
**Body may be shown
with optional features*

// PGNB GOOSENECK BODIES

STANDARD FEATURES

- Rub rails installed on both sides of DRW bodies for strap, side and stake pocket protection. Underbody tie down rails are not available on PGNB SRW models.
- Rugged 1/8" thick tread plate floor with 6" structural channel long sills (4" on 8' models)
- 12-gauge formed cross sills, spaced on 16" centers
- Bulkhead and rear skirt include integrated oval LED B/U and S/T/T lights
- Under-the-floor gooseneck hitch system with 2-5/16" ball installed (hitch is rated at 30,000 lb. gross trailer weight with 5,000 lb. tongue weight)
- Hinged access door to cover gooseneck hitch when not in use
- Integrated Class V receiver hitch rated at 18,000 lb. (optional on 8' bodies as most 56" CA chassis include a factory hitch)
- Formed, integrated bulkhead with stylized screened window and tapered design for improved visibility
- Aluminum tread plate trim piece on rear hitch plate provides a "no worry" step location
- Safety chain attachment points and 7-way trailer plug included in gooseneck box and at receiver hitch
- Durable oven-cured coat, finish painted black
- All marker, clearance and I.D. lights are LED
- Integrated driver side fuel fill cup
- Electrodeposition prime-paint system provides superior corrosion resistance



PGNA-116
**Body may be shown
with optional features*

// PGNA GOOSENECK BODIES

STANDARD FEATURES

- Internal stake pockets lining both sides and rear of the platform
- Rugged 1/8" thick tread plate floor with 6" structural channel long sills (4" on 8' models)
- 12-gauge formed cross sills, spaced on 16" centers
- Under-the-floor gooseneck hitch system with 2-5/16" ball installed (hitch is rated at 30,000 lb. gross trailer weight with 5,000 lb. tongue weight)
- Hinged access door to cover gooseneck hitch when not in use
- Integrated Class V receiver hitch rated at 18,000 lb. (optional on 8' bodies as most 56" CA chassis include a factory hitch)
- Formed, integrated bulkhead with stylized screened window and tapered design for improved visibility
- Aluminum tread plate trim piece on rear hitch plate provides a "no worry" step location
- Safety chain attachment points and 7-way trailer plug included in gooseneck box and at receiver hitch
- Durable oven-cured coat, finish painted black
- All marker, clearance and I.D. lights are LED
- Integrated driver side fuel fill cup
- Electrodeposition prime-paint system provides superior corrosion resistance



// PGND MODELS

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGND-738-G	7'3"	80"	1,156 lb.	42" CA SRW	61"	42"
PGND-868-G	8'6"	80"	1,391 lb.	56" CA SRW	61"	42"
PGND-86-G	8'6"	96"	1,582 lb.	56" CA DRW	64.5"	42"
PGND-96	9'6"	96"	1,656 lb.	60" CA DRW	71.5"	34"
PGND-116	11'6"	96"	1,939 lb.	84" CA DRW	71.5"	34"
PGND-96-MD	9'6"	96"	1,522 lb.	60" CA DRW	71.5"	34"
PGND-116-MD	11'6"	96"	1,951 lb.	84" CA DRW	71.5"	34"

// PGNC MODELS

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGNC-738-G	7'3"	84"	903 lb.	42" CA SRW	60"	42"
PGNC-868-G	8'6"	84"	1,065 lb.	56" CA SRW	60"	42"
PGNC-86-G	8'6"	96"	1,176 lb.	56" CA DRW	63"	42"
PGNC-96	9'6"	96"	1,270 lb.	60" CA DRW	70"	34"
PGNC-116	11'6"	96"	1,508 lb.	84" CA DRW	70"	34"
PGNC-96-MD	9'6"	96"	1,367 lb.	60" CA DRW	70"	34"
PGNC-116-MD	11'6"	96"	1,623 lb.	84" CA DRW	70"	34"

// PGNB MODELS

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGNB-738-G	7'3"	84"	722 lb.	42" CA SRW	59"	42"
PGNB-868-G	8'6"	84"	800 lb.	56" CA SRW	60"	42"
PGNB-86-G	8'6"	96"	862 lb.	56" CA DRW	64.25"	42"
PGNB-96	9'6"	96"	983 lb.	60" CA DRW	70"	34"
PGNB-116	11'6"	96"	1,112 lb.	84" CA DRW	70"	34"
PGNB-96-MD	9'6"	96"	1,098 lb.	60" CA DRW	70"	34"
PGNB-116-MD	11'6"	96"	1,250 lb.	84" CA DRW	70"	34"

// PGNA MODELS

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGNA-738-G	7'3"	80"	580 lb.	42" CA SRW	59"	42"
PGNA-868-G	8'6"	80"	751 lb.	56" CA SRW	60"	42"
PGNA-86-G	8'6"	96"	843 lb.	56" CA DRW	60"	42"
PGNA-96	9'6"	96"	958 lb.	60" CA DRW	72"	34"
PGNA-116	11'6"	96"	1,083 lb.	84" CA DRW	72"	34"
PGNA-96-MD	9'6"	96"	1,062 lb.	60" CA DRW	72"	34"
PGNA-116-MD	11'6"	96"	1,212 lb.	84" CA DRW	72"	34"

POPULAR OPTIONS


// PGND MODELS



ADDITIONAL ALUMINUM TREAD PLATE OVERLAY



CARGO D-RINGS



C-TECH DRAWER SETS



POWER LOCKS

Other options not shown:

- **LED COMPARTMENT LIGHTS**
- **3/16" TREAD PLATE FLOOR**

// PGNC/PGNB/PGNA MODELS



ROUGHNECK CONTRACTOR PACKAGE




4" REMOVABLE SIDE BOARDS



ABOVE BODY AND UNDERBODY TOOLBOXES

Other options not shown:

- **INTEGRATED OVAL B/U AND S/T/T LIGHTS IN REAR SKIRT**
Applies to PGNA model only
- **GOOSENECK HITCH AND TRAP DOOR REMOVAL**
Applies to PGNB and PGNA models
- **3/16" TREAD PLATE FLOOR**
Applies to PGNC and PGNB models
- **ADDITIONAL ALUMINUM TREAD PLATE OVERLAY**
Applies to PGNC and PGNB models

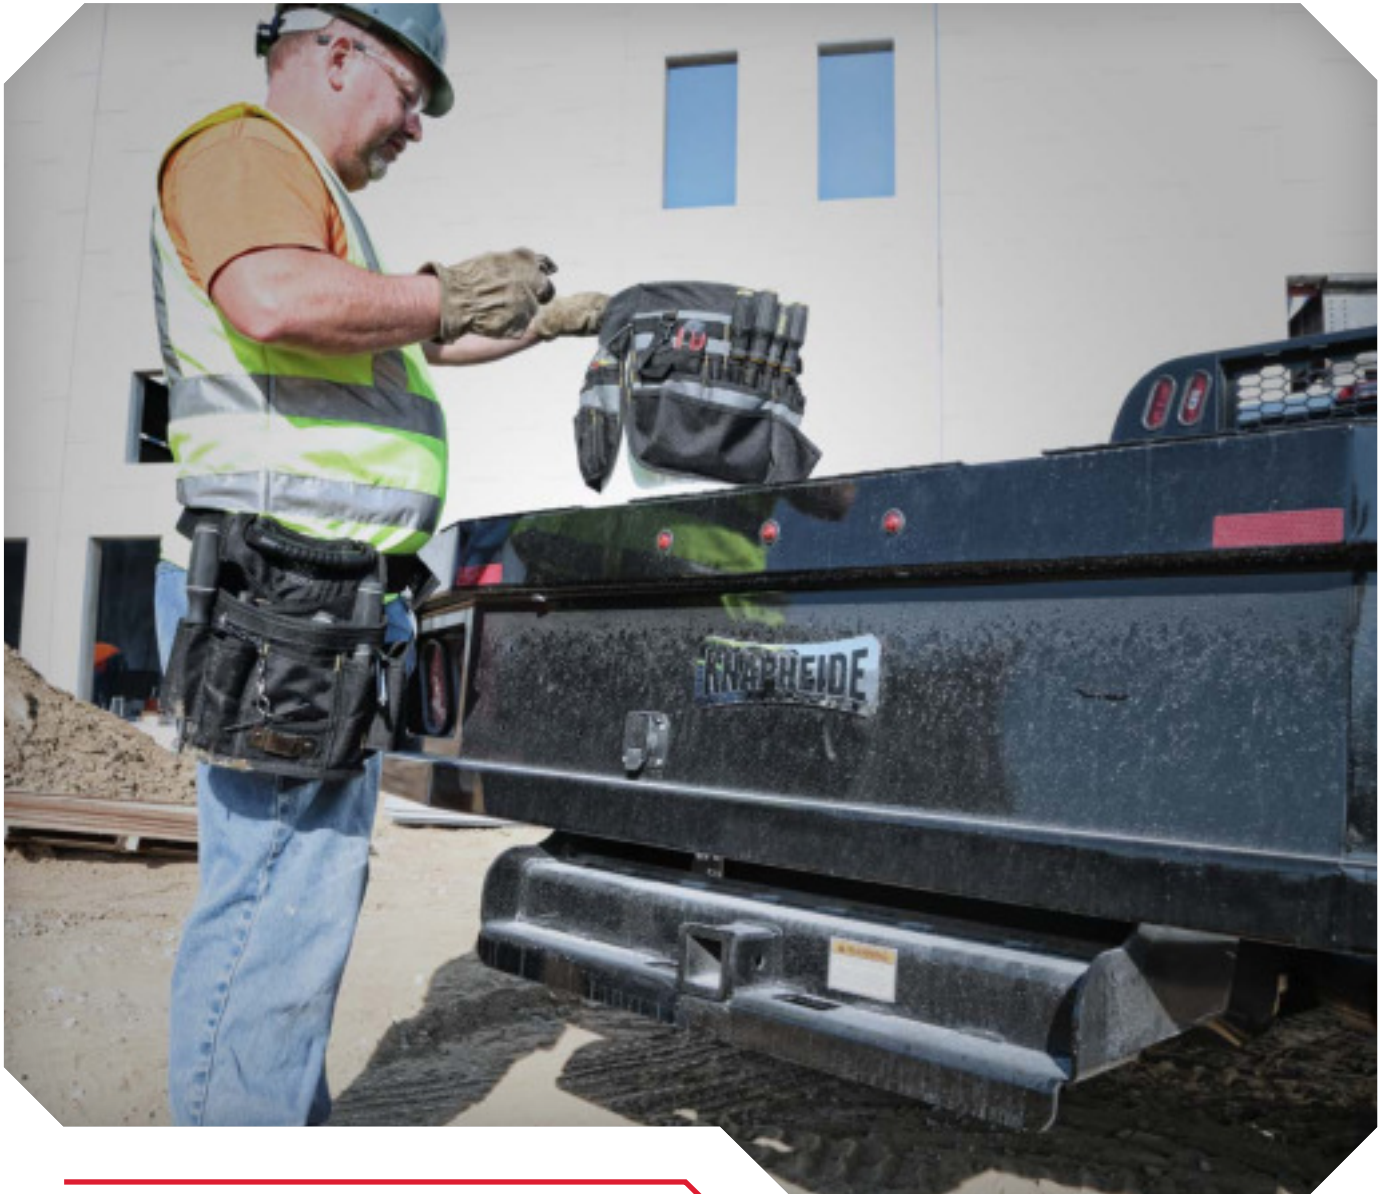

COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.

NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

Knapheide. Never settle.

THREE-YEAR, LIMITED WARRANTY



NO RUST
THROUGH



FREE FROM DEFECTS
IN WORKMANSHIP



FREE FROM DEFECTS
IN MATERIALS

Visit www.knapheide.com/warranty for more information.



The Knapheide Manufacturing Company
1848 Westphalia Strasse | Quincy, IL 62305

217-222-7131
www.knapheide.com

KNAPHEIDE
SINCE 1848