

With enhanced strength and stability for higher crane loads, numerous configuration possibilities, and a body rating of 52,000 ft-lb (7.9 tm), the Dominator I mechanics truck offers exceptional performance in virtually any industry. Pair it with the new 30 percent lighter IMT 6000 series crane and you've got the ultimate lightweight service truck package. The Dominator I also comes with payload increasing options such as a lightweight compact workbench bumper and a redesigned lightweight modular customizable bolt bin offering.

> BASE BODY SPECIFICATIONS

Body Size	9' (2.7 m)	9' (2.7 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)	11' (3.4 m)
Body Configuration⁴	LH & RH STD	RF RSD	LH & RH STD	RF RSD	LF RSD	LF & RF STD	LH AR, RF RSD	ALL RSD
Body Rating	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)	52,000 ft-lb (7.9 tm)
Body Weight ^{1, 3}	2728 lb (1237.4 kg)	2806 lb (1272.8 kg)	3103 lb (1407.5 kg)	3212 lb (1456.9 kg)	3212 lb (1456.9 kg)	3317 lb (1504.6 kg)	3495 lb (1585.3 kg)	3495 lb (1585.3 kg)
Body Width	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)	96" (2.4 m)
GVWR	14,000-19,500	14,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500	16,000-19,500
Storage Capacity ³	97.2 ft ³ (2.8 m ³)	104.2 ft ³ (2.9 m ³)	120.5 ft ³ (3.4 m ³)	131.3 ft ³ (3.7 m ³)	131.3 ft ³ (3.7 m ³)	142.2 ft ³ (4.0 m ³)	142.2 ft ³ (4.0 m ³)	166.1 ft ³ (4.7 m ³)
Angle of Departure	15°	15°	15°	15°	15°	15°	15°	15°
Chassis CA ²	60" (1.5 m)	60" (1.5 m)	84" (2.1 m)					
Max. IMT Crane Model	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'	8600 22'

¹ Includes doors, side packs, workbench. 2 Does not include welder deck. 3 Body weight and storage capacity are estimated based on standard product configuration.

⁴ Standard (STD) = 44", Raised (RSD) = 60"



> STANDARD FEATURES

- IMT Patented Inverted A-Frame Design
- · Three-Point Access
- Multiplex Electrical System with Programmable Logic
- IMT Compartment Coating (VOC-compliant polyurethane modified multicolor spray finish)
- Standard Workbench Bumper with through Compartment

> OPTIONS

- · Lightweight Compact Workbench Bumper without through Compartment
- · High-Intensity LED Lighting Package
- · Axalta Bedliner
- IMT SiteStar® Lube Skid
- Drawer Sets, Adjustable Shelves
- · Lightweight, Adjustable Bolt Bins
- · Front Stabilizers
- · Workbench Vises and Vise Plates
- · Energy-Absorbing Boom Support
- · Compartment Pressurization System
- · Compressed Air and Welding Systems
- · Headache Rack
- · Telescopic Roof
- Master Locks

COMPATIBLE IMT CRANES

ELECTRIC

HYDRAULIC

- 6006i 3203i
- 5005i 2020E
- 4004i 1015E

- · 8600 · 6000 · 2020
- 7500 2820 1015

BODY SUBSTRUCTURE

Patented A-Frame design with integrated crane box is engineered for maximum strength and weight reduction.




REAR ACCESS PACKAGE

Featuring an extended handle for an easy grip and an extra step, the standard rear access package improves accessibility and is available curbside and roadside.



LIGHTWEIGHT MODULAR BOLT BINS

New bolt bins can be configured in numerous ways to meet your field service needs.

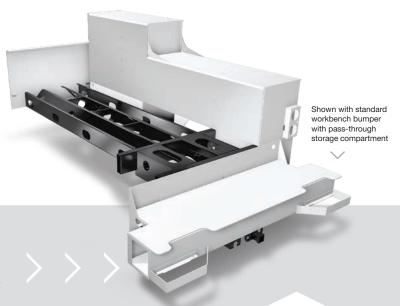



Iowa Mold Tooling Co., Inc. | 500 Highway 18 West | Garner, Iowa 50438 | 800-247-5958 | imt.com









